

Model	Housing	Driving ring	C	D	M	K
DMT 25AL	SAE #3	11.5"	409.5	352.35	35	39.6
	SAE #4	10"	361.9	314.25	30	53.8
		7.5"	361.9	241.25	30	30.2
	SAE #5	7.5"	314.3	241.25	24	30.2
DMT 50A	SAE #1	14"	511.1	466.65	75	25.4
DMT 90A	SAE #2	11.5"	447.6	352.35	35	39.6
DMT 100IV	SAE #3	11.5"	409.5	352.35	35	39.6
DMT 110A	SAE #4	10"	361.9	314.25	30	53.8
DMT 140H						


PRODUCT CAPACITIES



MODEL	Ratio	Max. Input Torque (kgf.m)	CAPACITY/ RPM		INPUT RATING						MAX RPM	APPROX. DRY WEIGHT(kg)	STANDARD BELL HOUSING
					1800RPM		2100RPM		2300RPM				
			kW	HP	kW	HP	kW	HP	kW	HP			
DMT 100HL	4.07, 4.50, 4.95	89	0.091	0.122	164	219	191	256	209	281	3000	263	1, 2, 3
	5.29	86	0.088	0.118	158	213	185	248	202	272			
	5.95	75	0.076	0.103	138	185	161	216	176	236			
DMT 135HL	4.07	131	0.134	0.180	241	324	282	378	309	415	2800	293	1, 2, 3
	4.50	125	0.128	0.172	230	309	269	361	295	396			
	4.95	115	0.118	0.158	214	287	249	334	272	365			
DMT 170HL	4.04, 4.48	168	0.172	0.231	310	416	361	485	396	531	2500	352	1, 2
DMT 180HL	5.15, 5.96	168	0.172	0.231	310	416	361	485	396	531	2500	475	1, 2

Classification and specification of the table could be different. Please contact us about it.

DIMENSIONS

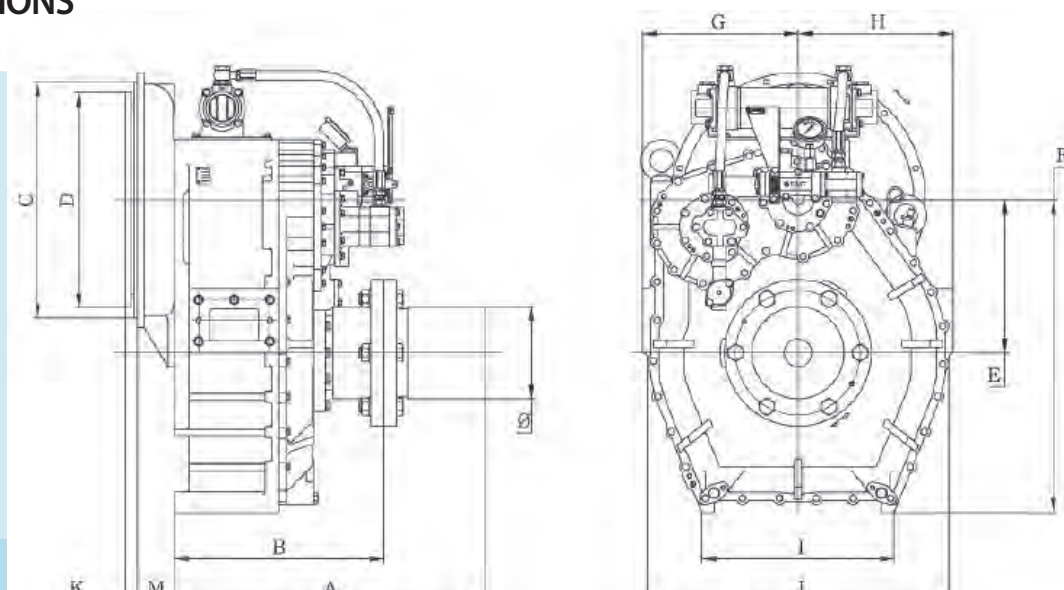

Model	A	B	E	F	G	H	I	J	Ø
DMT 100HL	501	351	274	563.5	284	284	370	552	134
DMT 135HL	503.2	351.2	274	563.5	284	284	370	552	148
DMT 170HL	580	390	260.9	521.5	280	258	316	510	180
DMT 180HL	617.5	427.5	331	667	337	337	425.5	654	180
DMT 190HL	625	405	261	530.5	280	258	307	510	200
DMT 260HL	673.5	453.5	331	662	337	337	432	654	200
DMTP 6500	777	527	415	842	440	440	448	756.2	220

Model	Housing	Driving ring	C	D	M	K
DMT 100HL DMT 135HL	SAE #1	14"	511.1	466.65	80	25.4
	SAE #2	11.5"	447.6	352.35	44.5	39.6
	SAE #3	11.5"	409.5	352.35	44.5	39.6
DMT 170HL DMT 180HL DMT 190HL	SAE #1	14"	511.1	466.65	64	25.4
	SAE #2	11.5"	447.6	352.35	46	39.6
	SAE #0	18"	647.7	571.5	81	15.7
DMT 260HL DMTP 6500	SAE #0	14"	647.7	466.65	81	25.4
	SAE #1	14"	511.1	466.65	81	25.4